




● 用途 Applications

浮油收集装置主要分为集渣斗和集油管。集渣斗一般为附属部件，只能与其它刮油设备配套使用，具体可参见刮油刮渣机等相关产品样本。本公司生产的JYG型集油管设在池水下游，主要适用于收集隔油池液面的浮油、平流沉淀池或浮选池液面的浮渣、泡沫等漂浮物。本产品采用蜗轮蜗杆传动，可根据液面不同，方便地进行调节。投资少，寿命长，使用维护方便，工作效果稳定可靠。

The floating oil-collecting device is mainly divided into scum collecting bucket and oil collecting pipe. The hopper is generally an accessory. It can only be matched to use with the other wipers, see the Sample about oil wipers, dross wipers and other relevant products for its details. Type JYG oil collecting pipe is settled on the lower reaches of the tank water. It is mainly suitable for collecting the floating oil on the surface of liquid in the oil separating tank and the floating dross, foam and other floating on the liquid surface in level flow precipitation tank or floating selecting tank. The driving device of worm-gears and worms are adopted for the product. The device can be conveniently adjusted according to the different liquid surface. The product is less in investment, long in service life, convenient in use and stable and reliable in operation.

● 型号示例 Type and Its Indication

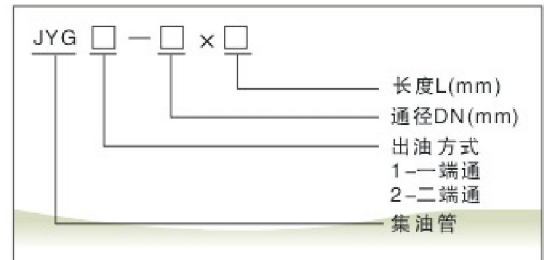


● 技术参数 Technical Parameters

口径 (DN) (mm)	工作环境温度 (°C)	h (mm)	L (m)	H (mm)
Φ200	0~60	50	3~10	~500
Φ300		100		



● 外形及尺寸 Shape and Size

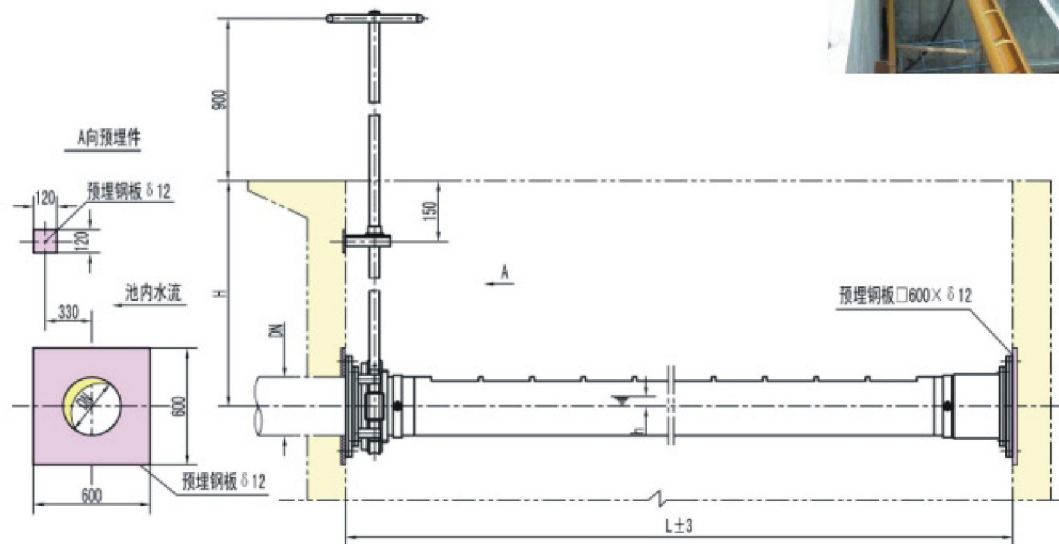

● 订货说明 Requirements for Order

1. 对于H、L有特殊要求时，或需工作桥，订货时应注明。
2. 图中所示为一端通，若用户需要二端通，则右边预埋钢板及池体结构应按左边形式。
3. 当环境温度低于0°C时，应考虑增加蒸汽或其它保温措施。
4. 需要其它形式集油装置，可参考另外章节。
5. 如需远程控制，本公司可配置电动装置，订货时注明。

1. If the parameters H & L are specially demanded or the working bridge is need, please note when order.
2. What is shown as the drawing is "one end going through". If the customers need "two ends going through", pre-embed the steel plate on the right side and the tank body structure on the right side should be as the from on the left side.
3. When the ambient temperature is lower than 0°C, increasing steam or heat insulating measures should be in consideration.
4. If the other forms of oil-collecting device are needed, you can consult the other relevant Chapters & Section.
5. If remote-control is required, please specify when ordering and we can provide electrical driven device.